

手磨砂纸 230X280mm

HAND SANDPAPER 230X280MM

干砂纸 Dry abrasives paper AP80



应用：用牛皮纸基体，其特殊涂层可以防堵塞和防静电。超强的打磨效率且使用寿命长。背面的乳胶纸弹性和强度较高，应用于高效的打磨家具行业中较硬的木材、油漆、墙面、腻子、冶金。广泛应用于金属和铝合金的抛光。

Applications:
The latex is impregnated and special coated to prevent clogging and static. It has super powerful sanding efficeience and long usage life. The super flexible and high strong latex paper backing allows to efficiently sanding hard wood paints outer wall putty and metallurgical appliances in furniture industries. It is also widely used in metal working and aluminum alloy polishing.

Order No	Abrasives	Backing	Bond	Available Grit size 粒度号																Form	Box/pcs
产品编号	磨料	背面	粘合剂	60	80	100	120	150	180	220	240	280	320	360	400	600	800	1000	1200		
AP80	A	latex(Cwt)	R/R	—	●	●	●	●	●	—	●	—	●	—	●	●	●	●	●	Sheet	100

水砂纸 Waterproof abrasive paper CC5P



应用：水砂纸（乳胶纸基体）可干湿打磨，其本身的弹性可打磨轮廓不规则的表面。通常用于水打磨油漆、底漆、汽车行业、机械部件和精密仪器。

Applications:
Waterproof abrasive paper (latex impregnated)for wet and dry sanding. The inherent flexibility allows contour of irregular surfaces. Usually used in wet sanding of paints, primes, surfaces of the automobile industries, mechanical components and precision instrument.

Order No	Abrasives	Backing	Bond	Available Grit size 粒度号																Form	Boxes			
产品编号	磨料	背面	粘合剂	60	80	100	120	150	180	220	240	280	320	360	400	600	800	1000	1200	1500	2000	2500		
CC5P	C	latex(Cwt)	R/R	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	Sheet	100

更多规格请参考大象详细产品画册

Please refer to the detailed records production for more specifications

砂带

ABRASIVE BELT

以无纺布为基体，高温煅烧磨料，表面附带进口涂层，硬质布基，承载强度高，适用于打磨木材、铁件、锌合金、不锈钢等不同材料，打磨效果好，磨削量大。
Basing on woven cloth and high temperature calcination abrasives, its surface is also coated with imported materials. With hard cloth & high pressure support, it is applicable to ginding wood, iron, zinc alloy, stainless steel and other materials with high & effective performance.



产品编号 Order No	粒度号 Available Grit size												size(mm) 尺寸	
	60	80	100	120	150	180	240	320	400	600				
AB502100AH60#	●	●	●	●	●	—	●	●	—	—			50X2100	
AB100915AH60#	●	●	●	●	●	●	●	●	●	●			100X9100	
AB100610AH60#	●	●	●	●	●	●	●	●	●	●			100X610	
AB75533AH60#	●	●	●	●	●	●	●	●	●	●			75X533	
AB1751524AH60#	●	●	●	●	●	●	●	●	●	●			175X1524	

更多规格请参考大象详细产品画册


Please refer to the detailed records production for more specifications

黑金刚 75-180mm

NON-WOVEN FABRIC DISCS 75-180MM

黑金刚磨具，主要用来除锈、除漆和抛光。它是用浸渍有碳化硅的尼龙丝网组成，是理想的表面处理和维护的工具，由于它多孔结构，黑金刚很容易去除杂质，使用后还可以清洗，适用于去除钢板上的油漆、去除金属零件上的锈迹，不锈钢抛光，焊接焊缝的清理。

Abrasives Non-Woven fabric disc for cleaning, sorting and polishing.Made from an endless web of nylon filaments, impregnated with Silicon Carbide grit.Ideal for surface preparation and maintenance applications.Thanks to its open structure, the Non-woven fabric disc removes the material easily,and can be rinsed after use. Remove paint from steel plates without scra tching. Rust and dust removal of metal parts.Stainless steel polishing and weld clean ing. Choice of backings to suit applications.

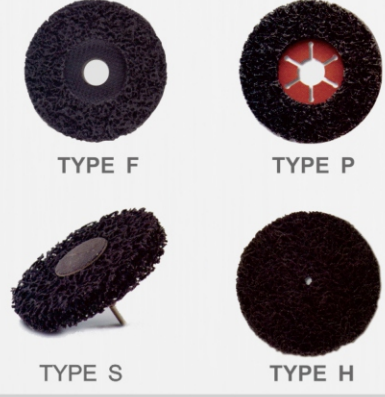

TYPE F

TYPE P

TYPE S

TYPE H

更多规格请参考大象详细产品画册

Please refer to the detailed records production for more specifications

手持无纺布

HAND USE NON-WOVEN FABRIC



主要用于不锈钢、铝合金、铜及各种金属材料的表面除锈，电镀产品修饰纹线，可用于机修或者上漆，上胶或其他涂附作业之前处理，广泛应用于各种材料的清洁、抛光、去除毛刺和突起

Mainly for surface corrosion removal of stainless steel, aluminum alloy, copper and other metal materials, electroplate products, Decorative streakline.Before painting, coating and other coated treatments. Widely used in cleaning, polishing and removing burrs and bumps for all materials.




海绵砂块

SPONGE SANDING BLOCK



适合于曲面研磨，并可吸水，保持长时间带水研磨,可代替水砂纸，海绵磨块适用于手工打磨家具，塑胶产品表面抛光，汽车维修补漆处打磨，金属锈斑及塑料的表面处理。

It is suitable to grind curved surface in bibulous situation at the same time. If keep it grinding with water for a long time, it can take place of waterproof sand paper. Sponge sand block is applied to grind furniture by hand and touchup places on cars, polish the surface of plastic products, extraneous rust on metal.

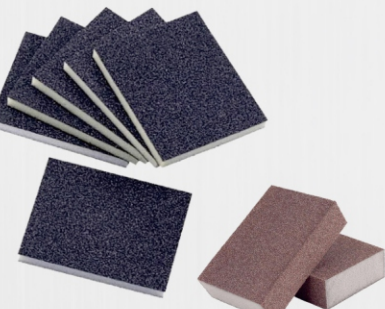

特点：耐水，耐酸碱，柔软，干磨、湿磨均可,可清洗，可重复使用
Feature: watertolerant, acids and alkali, soft, dry&wet grinding, washable and reuse.


羊毛轮

FELT WHEEL



专用于抛光或修补擦伤之不同材料，如玻璃、陶瓷、石材、金属、塑料和珠宝等。与抛光剂一同使用。一般羊毛轮用在玻璃制品、医疗器械、精密仪器、木器、珠宝、不锈钢工艺品、不锈钢板的抛光。

Specialy used for polishing and repairing scratches on various materials, such as glass,ceramics,stone,metal and jewels. Used together with polisher. Generally, felt wheels are used to polish glass products, medical devices, wood, jewellery, stainless steel crafts and stainless steel plates.



大象磨具公司简介

珠海大象磨料磨具有限公司，成立于1992年，是中国拥有自主品牌最多的集研发、生产、销售、服务为一体的综合性企业。是中国机床工业协会磨料磨具分会副会长单位、全国磨料磨具标准化委员会成员、中国工商业联合会五金机电电商会常务理事单位、中国五金交电化工商业协会常务理事单位，通过国家高新技术企业认定，是中国知名的专业树脂磨具制造商，生产规模在亚洲位居前列。

经过25年的磨砺，珠海大象凭借与时俱进、创新求变的企业理念，专业的市场运作、成熟的品牌运营和科学的服务体系，已经成为中国磨具行业标杆，国家标准制作单位，亚洲最具品牌影响力的磨具制造商和运营商。是中国乃至全球拥有自主品牌最多的品牌企业。并连续获得《中国磨料磨具著名产品》、“全国磨料磨具行业磨具企业十强”、“广东省著名商标”等殊荣。被中国五金评为“中国五金行业的风向标”创新产品称号。是《中国研磨》、《中华五金》重点推荐单位。

公司严格按照ISO9001质量体系实施品质控制，通过德国MPA权威检测机构认证，符合欧洲EN12413切割磨削工具类安全标准。目前生产能力为年产量3.2亿片以上，年纳税额近千万元。目前将迎来汇集产品总部基地、物流、研发、结算中心为一体的高端办公、工业混合项目的大象总部园的竣工。它不仅代表着大象总部园将成为中国具备最强科技研发能力和最新国际检测技术的最大研发中心，也是助力中国制造2025的标杆示范单位。

以品质为基，以创新为翼。大象将乘着时代科技进步的东风，在机遇与挑战中奋力前行，开启新征程，谱写新辉煌！

Zhuhai Elephant Abrasives Co., Ltd., was founded in 1992, and has become an integrated enterprise in research & development, production, sales & service. Elephant is the vice president unit of China Machine Tool & Tool Builder's Association abrasive branch ,and The Committee members of the National Abrasives Standardization , the unit of China Hardware And Electromechanical Chamber Of Commerce, China National Hardware Electric and Chemical Products Commercial Association . Ele is identified by the national high-tech enterprises as China's leading professional resin abrasive manufacturers, and production scale is in the forefront in Asia.

After 25 years of sharpening,with the times, innovation and change the corporate philosophy, professional operation of the market, a mature brand operations and scientific service system, ELE has become China's abrasive industry benchmark and Asia's most influential brand of abrasive manufacturers and operators.Ele has its own brand at most in China even all over the word, And achieves the honorable mentioning as"Chinese famous abrasives", "Chinese top 10 enterprises in Abrasives Industry","Guangdong famous brand in abrasives field", " Vane of Chinese Hardware industry -creative products" the Chinese hardware key recommendation units.

ELE in strict accordance with the ISO9001 quality control system , passed the German MPA certification ,met the European EN12413 cutting tool grinding safety standards. The current production capacity is over 320 million ,and more than 10 million yuan in tax.It not only represents the elephant headquarters park will become China's the strongest and the latestest technology in researching and testing , it also will be one of the largest research and development centers.The elephant will also become Benchmarking demonstration unit to promote the project of the China manufacture 2025.

As the base of quality, as the wing of innovation. ELE will ride the east wind of scientific and technological progress , move forward in opportunities and challenges , open a new journey, and write a new glory.



珠海大象磨料磨具有限公司

ZHUHAI ELEPHANT ABRASIVES CO.,LTD.

中国·广东省·珠海市·前山福溪工业区
Fuxi Industrial Qianshan Zhuhai Guangdong China
电 话:+86-756-8521313 E-mail:info@eleabrasives.com
传 真:+86-756-8521452 http://www.eleabrasives.com



关注官方微信
了解更多资讯

加盟热线 Franchise Hotline: +86-0756-8521300/8521600
投诉直线 Complaint Hotline: +86-0756-8666315

以上图文资料仅供参考所用，如有变更恕不另行通知
The above information and pictures are for your reference only and subject to change without notice.

涂附磨具

COATED ABRASIVES



弹性抛光磨盘/页轮 T27/29型


FLEXIBLE POLISHING DISCS/FLAP DISCS TYPE 27/29



A

产品特点 Features


优质的氧化铝磨料，适用于所有材料，不伤工件，耐用，性能好。
High-quality aluminum oxide grains. For all material. Long lifespan, high performance.



XA

产品特点 Features

优质的煅烧氧化铝磨料，适用于所有材料，不伤工件，更耐用，性能更好。
High-quality calcined aluminum oxide grains. For all material. Long lifespan, high performance.



Z

产品特点 Features

优质的锆刚玉磨料，适用于不锈钢或耐高温钢表面打磨焊缝、倒角或去毛刺。优异性价比，更耐用，性能好。
High-quality zirconia alumina grains. For grinding tasks such as weld seam dressing on planar surfaces, suitable for duty deburring and beveling work on stainless and high-temperature. Excellent quality price ratio, high performance.

Order No	尺寸 (Dimension)		Shape	Max r.p.m.	Speed m/s	包装数量 Packing Qty	
产品编号	公制(mm)	英寸(inch)	形状	转速	速度	盒 / 箱 boxes/ctn	片 / 箱 pcs/ctn
27A10016Y38J	100X16/38	4x ⁵ / ₈ "		15200	80	--	100
27A10016Y72J	100X16/72	4x ⁵ / ₈ "		15200	80	--	300
27A11522Y72J	115X22.2/72	4 ¹ / ₂ x ⁷ / ₈ "		13300	80	--	300
27A12522Y72J	125X22.2/72	5x ⁷ / ₈ "		12200	80	--	240
27A15022Y72J	150X22.2/72	6x ⁷ / ₈ "		10200	80	--	180
27A18022Y72J	180X22.2/72	7x ⁷ / ₈ "		8500	80	--	120
27XA10016Y72J	100X16/72	4x ⁵ / ₈ "		15200	80	--	300
27XA11522Y72J	115X22.2/72	4 ¹ / ₂ x ⁷ / ₈ "		13300	80	--	300
27XA12522Y72J	125X22.2/72	5x ⁷ / ₈ "		12200	80	--	240
27XA15022Y72J	150X22.2/72	6x ⁷ / ₈ "		10200	80	--	180
27XA18022Y72J	180X22.2/72	7x ⁷ / ₈ "		8500	80	--	120
27-29Z10016Y90IJ	100X16/90进口布	4x ⁵ / ₈ "		15200	80	--	300
27-29Z11522Y90IJ	115X22.2/90进口布	4 ¹ / ₂ x ⁷ / ₈ "		13300	80	--	300
27-29Z12522Y90IJ	125X22.2/90进口布	5x ⁷ / ₈ "		12200	80	--	240
27-29Z15022Y90IJ	150X22.2/90进口布	6x ⁷ / ₈ "		10200	80	--	180
27-29Z18022Y90IJ	180X22.2/90进口布	7x ⁷ / ₈ "		8500	80	--	120

粒度号：40# 60# 80# 100# 120# 180# 240# Available grit size: 40# 60# 80# 100# 120# 180# 240#

带柄页轮 20-80mm

SAMLL DIAMETER FLAP DISCS 20-80MM



A 氧化铝 Type aluminum oxide A

A 级棕刚玉适用于钢材和不锈钢，粒度从粗到细为60-120#。超精加工粒度号采用 150-320#。
Type aluminum oxide A for steel and stainless steel, For Coarse and fine grinding applications use grits A60-120, For ultra-fine finishes use grits A150-320

Order No.	Head dia.x head height A=Aluminium oxide 氧化铝 DXT 外径 X厚度	shank dia. mm 柄径	Max. speed rpm 转速	Pcs/Box 包装数量
Available grit sizes 粒度号 DXT 60 80 120 150 180 240 320				
FP2025/6A	20x25	6	28000	40
FP2525/6A	25x25	6	23000	30
FP3025/6A	30x25	6	18000	25
FP4025/6A	40x25	6	18000	15
FP5025/6A	50x25	6	12000	10
FP6025/6A	60x25	6	12000	14
FP7025/6A	70x25	6	9000	9
FP8025/6A	80x25	6	9000	8

大带柄页轮 100-200mm

LARGE DIAMETER FLAP DISCS 100-200MM



A 氧化铝 Type aluminum oxide A

A 级棕刚玉适用于钢材和不锈钢，粒度从粗到细为60-120#。超精加工粒度号采用 150-320#。
Type aluminum oxide A for steel and stainless steel, For Coarse and fine grinding applications use grits A60-120, For ultra-fine finishes use grits A150-320

Order No.	Available grit sizes 粒度号 A=Aluminium oxide氧化铝	Dia. mm 外径	Width mm 厚度	Bore mm 孔径	Max. speed rpm 转速	Pcs/Box 包装数量
60 80 120 150 180 240 320						
FP10025A	●●●●●●●●●●	100	25	25.4	9500	2
FP10030A	●●●●●●●●●●	100	30	25.4	9500	2
FP10050A	●●●●●●●●●●	100	50	25.4	9500	2
FP12525A	●●●●●●●●●●	125	25	25.4	8500	2
FP15025A	●●●●●●●●●●	150	25	25.4	6300	2
FP15030A	●●●●●●●●●●	150	30	25.4	6300	2
FP15050A	●●●●●●●●●●	150	50	25.4	6300	2
FP16525A	●●●●●●●●●●	165	25	25.4	5700	2
FP16530A	●●●●●●●●●●	165	30	25.4	5700	2
FP16550A	●●●●●●●●●●	165	50	25.4	5700	2
FP20025A	●●●●●●●●●●	200	25	44.0	4700	2
FP20030A	●●●●●●●●●●	200	30	44.0	4700	2
FP25025A	●●●●●●●●●●	250	25	44.0	4100	2
FP25032A	●●●●●●●●●●	250	32	44.0	4100	2
FP25035A	●●●●●●●●●●	250	35	44.0	4100	2
FP25040A	●●●●●●●●●●	250	40	44.0	3200	2
FP30025A	●●●●●●●●●●	300	25	44.0	3200	2
FP30032A	●●●●●●●●●●	300	32	44.0	3200	2
FP30035A	●●●●●●●●●●	300	35	44.0	3200	2
FP30050A	●●●●●●●●●●	300	50	44.0	3200	2

拉绒片 100-180mm

VELCRO SANDING DISCS 100-180MM



氧化铝 Aluminium oxide A

适用于所有类型的木材，碎木板及合成板，也适用于金属。
Applicable to all kinds of wood, wood fragments, plywood and metal.


Order No.	Available grit sizes										D1 (mm)	Pcs/Box
	40	60	80	100	120	150	180	240	320	400		
VCR 100 O LA	●	●	●	●	●	—	●	●	—	—	100	100
VCR 115 O LA	●	●	●	●	●	—	●	●	—	—	115	100
VCR 125 O LA	●	●	●	●	●	—	●	●	●	—	125	100
VCR 150 O LA	—	●	●	—	●	—	●	—	●	—	150	100
VCR 180 O LA	—	●	●	—	●	—	●	●	—	—	180	100
VCR 115 6 LA	●	●	●	●	●	—	●	—	—	—	115	100
VCR 125 6 LA	●	●	●	●	●	—	●	●	●	—	125	100
VCR 150 6 LA	—	●	●	—	●	—	●	—	●	—	150	100
VCR 180 6 LA	—	●	●	—	●	—	●	●	—	—	180	100

*Other grit and size available on request

高质量的氧化铝，白色涂层。适用于有油漆，清漆和带有污点的材料。
High-quality abrasive paper, especiallyly suited for paint, varnish and filler
Applications: Paint / Varnish / filler

Order No.	Available grit sizes										D1 (mm)	Pcs/Box
	40	60	80	100	120	150	180	240	320	400		
VCR 100 O LASW	—	●	●	—	●	—	●	●	—	—	100	100
VCR 115 O LASW	—	●	●	—	●	—	●	—	—	—	115	100
VCR 125 O LASW	●	●	●	●	●	—	●	●	●	—	125	100
VCR 150 O LASW	—	●	●	—	●	—	●	—	—	—	150	100
VCR 180 O LASW	—	●	●	—	●	—	●	●	—	—	180	100
VCR 125 6 LASW	●	●	●	●	●	—	●	●	●	—	125	100
VCR 150 6 LASW	—	●	●	—	●	—	●	—	—	—	150	100
VCR 180 6 LASW	—	●	●	—	●	—	●	—	—	—	180	100

*Other grit and size available on request

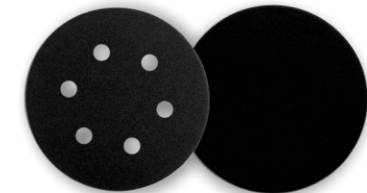

碳化硅 Silicon carbide Sic

碳化硅化合物，适用于打磨石头、大理石、花岗岩、玻璃，甚至塑料和搪瓷。
Applications: Stone / Marble, granite, glass, even plastic and enamel.

Order No.	Available grit sizes														D1 (mm)	Pcs/Box
	40	60	80	100	120	150	180	240	320	400	600	800	1000			
VCR 100 O LC	—	—	●	—	—	—	—	—	—	—	—	—	—	—	100	100
VCR 115 O LC	—	—	●	—	—	—	—	—	—	—	—	—	—	—	115	100
VCR 125 O LC	—	—	●	—	—	—	—	—	—	—	—	—	—	—	125	100
VCR 150 O LC	—	—	●	—	—	—	—	—	—	—	—	—	—	—	150	100
VCR 180 O LC	—	—	●	—	—	—	—	—	—	—	—	—	—	—	180	100
VCR 115 6 LC	●	●	●	—	●	—	—	—	—	—	—	—	—	—	115	100
VCR 125 6 LC	—	—	—	—	—	—	—	—	—	—	—	—	—	—	125	100
VCR 150 6 LC	—	—	●	●	—	—	—	—	—	—	—	—	—	—	150	100
VCR 180 6 LC	●	—	●	●	—	—	—	—	—	—	—	—	—	—	180	100

*Other grit and size available on request

氧化铝 Aluminium oxide A

黄涂层砂纸永久粘着砂盘，具有高稳定性，用来打磨旧的漆，硬木料，玻璃纤维或有污垢的材料，黄涂层砂纸经久耐用。

High-quality abrasive paper, especiallyly suited for paint, varnish and filler

Applications: Paint / Varnish / filler

Order No.	Available grit sizes										D1 (mm)	Pcs/Box
	40	60	80	100	120	150	180	240	320	400		
VCR 100 O LASY	—	●	●	—	●	—	—	—	—	—	100	100
VCR 115 O LASY	—	●	●	—	●	—	—	—	—	—	115	100
VCR 125 O LASY	●	●	●	●	●	—	●	●	●	—	125	100
VCR 150 O LASY	—	●	●	—	●	—	—	—	—	—	150	100
VCR 125 6 LASY	—	●	●	—	●	—	—	—	—	—	125	100
VCR 150 6 LASY	—	●	●	—	●	—	—	—	—	—	150	100
VCR 180 O LASY	—	●	●	—	●	—	—	—	—	—	180	100
VCR 180 6 LASY	—	●	●	—	●	—	—	—	—	—	180	100

*Other grit and size available on request



垫盘 Backing pads

用于拉绒片的垫盘，塑料材质，适用气动工具。限速80米/秒
Backing pad for Velcro sanding discs, plastic, suitable for Air tools. Max operating speed 80m/s


Order No.	Matching backing pad	Suitable for discsøin mm	Max.operating speed	Max. Speed RPM	Pcs/Box
PDV 8		115	80m/s	13300	1
PDV 8		125	80m/s	12200	1
PDV 8		150	80m/s	10200	1
PDV 8		180	80m/s	8500	1

适用电动工具。限速80米/秒 Suitable for electric tool. Max operating speed 80m/s

Order No.	Matching backing pad	Suitable for discsøin mm	Max.operating speed	Max. Speed RPM	Pcs/Box
PDV M14		100	80m/s	15200	1
PDVM10 PDVM14		115	80m/s	13300	1
PDV M14		125	80m/s	12200	1
PDV M14		150	80m/s	10200	1
PDV M14		180	80m/s	8500	1

钢纸磨片 100-230mm

FIBRE DISCS 100-230MM

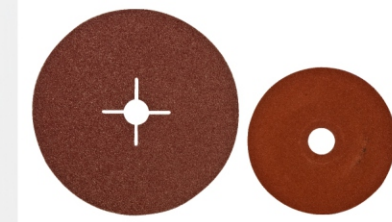

A 氧化铝 Aluminum oxide TYPE A

- 金象品牌多种用途的钢纸磨片主要用于钢铁，有色金属，塑料，铝，木材（例如：建筑模板清洗）和钢结构整理工作。
- Gold elephant multipurpose fibre discs for use on steel, non ferrous metals, plastics, aluminum and wood (e.g., cleaning of construction formwork) and steel construction finishing work.

Order No	可选粒度号 Grit size							Matching Backing pad	尺寸 (Dimension)		Speed m/s	Box Qty
产品编号	16	24	36	60	80	100	120	匹配胶垫	公制(mm)	英寸(inch)	转速	盒 / 片
FB100-16A	●	●	●	●	●	●	—	PD100 M14	100(4")	16(5/8")	14500	25
FB115-22A	●	●	●	●	●	●	—	PD115 M14	115(4-1/2")	22.2(7/8")	13300	25
FB125-22A	●	●	●	●	●	●	—	PD125 M14	125(5")	22.2(7/8")	12200	25
FB150-22A	—	●	●	●	●	●	—	PD150 M14	150(6")	22.2(7/8")	10200	25
FB180-22A	●	●	●	●	●	●	●	PD180 M14	180(7")	22.2(7/8")	8500	25
FB230-22A	—	—	●	●	—	—	—	PD230 M14	230(9")	22.2(7/8")	6500	25